



Supertif

Flow-regulated on-line dripper

Outstanding flow-regulated dripper
Constant water flow rates over a wide pressure range

Main Features:

- 3 different outlet configurations:
 - Raised conic outlet - compatible with Plastro's multi-branched adaptors
 - SLB* - Raised barbed outlet matches 3x5 mm microtube
 - SOL* - 90° barbed side outlet matches 3x5 mm microtube
- * Available in flow rates 2.2, 3.85 lph
- Ensures constant flow rates along long run driplines and under challenging topographical conditions
- Self-activated flushing mechanism
- Manufactured from superior, durable materials for long life
- Protected against UV degradation
- Resistant to chemicals and fertilizers commonly used in agriculture
- Complies with emission uniformity category A (ISO 9261)

Specifications:

- Flow rates: 2.2, 3.85, 7.8, 12, 25 lph
- Operating pressure range: 0.6 - 3.5 bar

Installation:

Use 2 mm punch tool

Applications:

- On sloping terrain or where long driplines are required
- Watering plants in containers
- Home gardens





Maximum Recommended Dripline Length (m) on Flat Terrain

Color Code & Lph	Emitter Spacing (m)	Dripline Inlet Pressure (bar)											
		Pipe Diameter (mm) O.D.12 / I.D. 9.8			Pipe Diameter (mm) O.D.16 / I.D.13.6			Pipe Diameter (mm) O.D.17.8 / I.D.15.2			Pipe Diameter (mm) O.D.20 / I.D.17.4		
		1.0	2.0	3.0	1.0	2.0	3.0	1.0	2.0	3.0	1.0	2.0	3.0
Brown ● 2.2	0.30	33	51	61	66	102	123	83	129	156	110	172	208
	0.40	42	65	78	82	128	154	103	161	195	136	212	258
	0.50	51	79	95	98	152	184	122	191	231	159	249	302
	0.60	59	91	110	112	174	211	139	217	263	181	283	344
	0.75	70	108	131	131	206	249	163	255	309	211	331	401
	1.0	87	135	164	161	253	306	199	312	379	256	402	488
Black ● 3.85	0.30	23	35	42	46	71	85	58	90	109	77	120	145
	0.50	35	55	66	68	106	128	85	133	161	111	174	211
	0.75	49	75	91	92	143	173	114	178	216	147	231	281
	1.0	60	94	114	113	176	214	139	218	264	179	281	341
	1.25	71	111	135	131	206	250	163	254	309	208	326	396
	Green ● 7.8	0.30	14	22	27	29	45	54	37	57	69	49	76
0.50		22	35	42	43	67	81	54	84	102	71	111	134
0.75		31	48	58	59	91	110	72	113	137	94	147	179
1.0		38	60	72	72	112	136	88	139	168	114	179	217
Red ● 12.0	1.25	45	70	85	84	131	159	103	161	196	133	208	253
	0.50	17	26	31	33	51	61	41	64	77	54	84	102
	0.75	23	36	44	44	69	83	55	86	104	71	112	135
	1.0	29	45	55	54	85	103	67	105	127	86	136	165
Orange ● 25.0	1.25	34	54	65	64	100	121	79	123	149	106	158	191
	0.50	11	16	20	20	32	38	26	40	48	34	52	64
	0.75	14	23	27	28	43	52	35	53	65	44	70	85
	1.0	18	28	34	34	53	64	42	66	80	54	85	103
1.25	21	34	40	40	63	75	49	76	93	63	99	120	





Straight conic outlet



Straight barbed outlet



Barbed elbow outlet

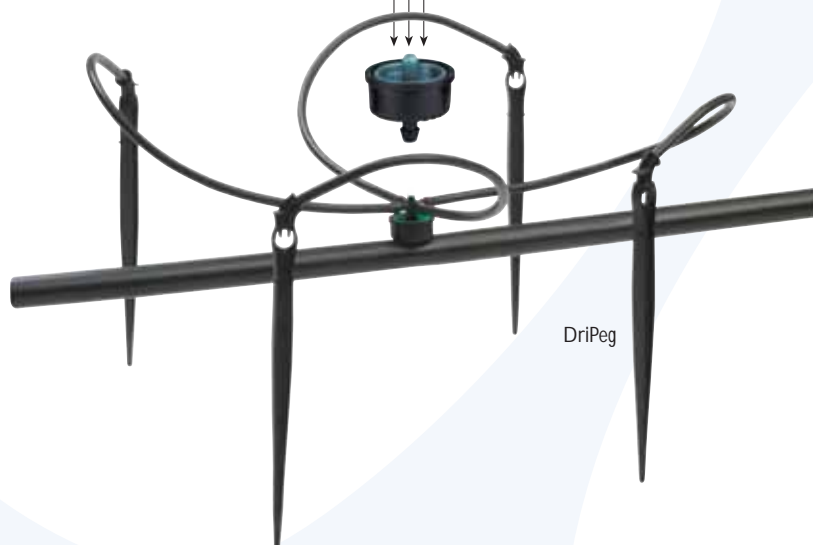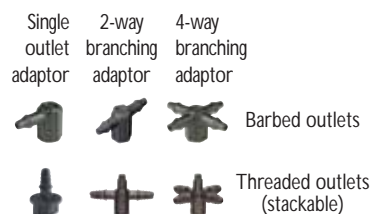

The data in this leaflet provides general information only. Plastro may redesign and/or modify its products, and may change the information contained herein. For design purposes, see and use Plastro's most updated manual for designers.